

**COLORWAY:** Blue Purple

| | |
|---|---|
| **SIZES** | Double Roll (24" x 27 ft), Single Roll (24" x 12 ft) |
| **PATTERN MATCH** | Straight |
| **MATERIAL** | Non-woven natural fibers and wood pulp, PVC-free |
| **WEIGHT** | 180 gsm (8 oz per linear yard), 0.011" thick |
| **FINISH** | Smooth matte |
| **APPLICATION** | Unpasted. Paste the back with clay paste (Roman PRO-838) |
| **SEAMS** | Double cut. Printed with ½" of extra pattern on each side |
| **CLEANING** | Mild soap and warm water on a soft sponge |
| **FIRE RATING** | ASTM E-84 Class A |
| **USE** | Domestic |
| **SKU** | KK17139_Blue_Purple_KH300 |


KATIE KIME


Trade & project inquiries: trade@katiekime.com

katiekime.com/products/ft-worth-toile-wallpaper


**KATIE KIME**

# Fort Worth Toile Traditional Wallpaper

Inspired by Where the West Begins! This hand-illustrated Fort Worth Toile features the iconic Fort Worth Stockyards, the Trinity River, the Fort Worth Opera, all things country Western, and hints of what makes this city so special to Texas. All Katie Kime Wallpaper is printed on-demand and in-house with eco-friendly inks on premium, smooth, matte paper. Our high quality wallpaper is available in a variety of bold, beautiful, and unique prints designed by the Katie Kime team.

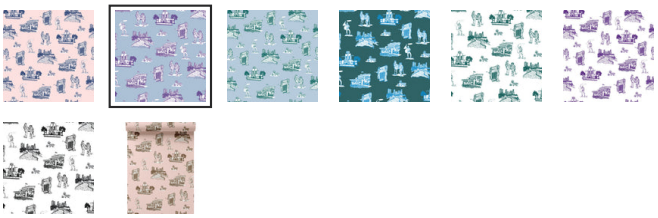

**SUSTAINABILITY**

- Printed in-house to order, so nothing is overproduced.
- PVC-free paper of natural fibers and wood pulp, from FSC-sourced materials.
- Free of phthalates, plasticizers, formaldehyde, chlorine and heavy metals. Low VOC, meets California Section 1350.

**ORDERING & DELIVERY**

- Samples are for reviewing material, scale and print; color can shift slightly between print runs.
- Order all rolls for a project at once: rolls printed in different runs may not match exactly.
- Trade partners save 25% on wallpaper and fabric. Type II commercial vinyl available on request. trade@katiekime.com

# Traditional Wallpaper

**CERTIFICATIONS**

- Fire rating: ASTM E-84 Class A, NFPA 101.
- Breathable: 66 perms (ASTM E96).
- PVC-free and Prop 65 compliant.

**INSTALLATION**

- Prime & plan: Prime with a breathable wallcovering primer. Draw a plumb line with a level and cut each panel 4" longer than the wall.
- Paste & book: Roll clay paste over the back of the panel, fold both ends to the middle, and let it rest about 10 minutes.
- Hang & double cut: Each panel is printed with ½" of extra pattern on each side for the double cut. Hang the next panel so it overlaps the first by about 1", with the pattern matched, then cut through both layers down the middle and lift out the strips.

**QUESTIONS**

- Fire certificates, test reports and project quotes: trade@katiekime.com